


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.0V I:0.4582A P:59.52W PF:0.5957 Freq:50.00Hz Lamp Flux:2302.65x1 lm		
NAME: EDC-Double EFFECT-60W-NW	TYPE: SMD	WEIGHT:
SPEC.: 1	DIM.:	SERIAL No.: 1
MFR.: Sepehr Monavar Co.	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 102.89 lm/W
MODEL	DOUBLE EFFECT-60W	I _{max} (cd)	1005	S/MH (C0/180)		1.23
NOMINAL POWER (W)	60	LOR (%)	100.0	S/MH (C90/270)		1.22
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	6124	η UP, DN (C0-180)		0.0, 49.7
NOMINAL FLUX (lm)	6036	CIE CLASS	DIRECT	η UP, DN (C180-360)		0.0, 50.3
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM		1.25
TEST VOLTAGE (V)	220	η down (%)	100.0	CIBSE SHR MAX		1.25

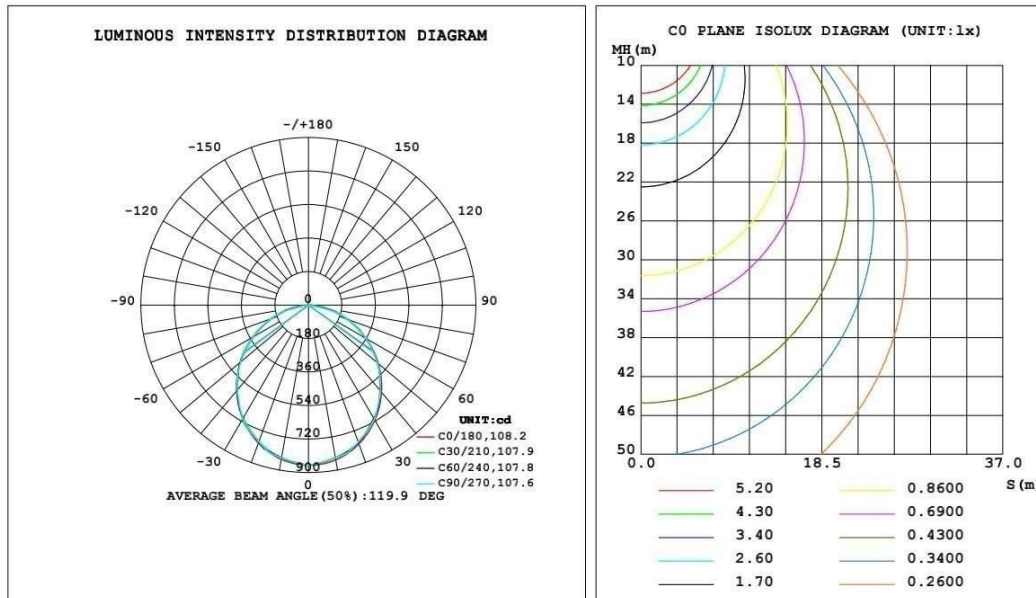

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Sepehr Monavar
Test Date: 20-08-2024

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000 SYSTEM V2.0.361
Humidity: 38%
Test Distance: 10.000m [K=1.0000]
Remarks: